

# BALE FORKS




## KEY POINTS

- Quick-release tines via through-bolt
- Several assemblies possible, suitable for handling both round and square bales.
- Large tines and sturdy design for a high payload.

## SPECIFICATIONS

Coupling	3-pt rear on tractors		On front loaders		On telescopic loaders
Type of coupling	cat. 1 on pins	cat. 2 clevis hitch	MX - Euro Fauchaux Blanc	MX - Euro Fauchaux Blanc	Merlo - JCB - Manitou - Claas - MF - Bobcat
Models	2 teeth		2 teeth	3 teeth (provision for 5 teeth)	
Ø of teeth	35 mm			40 mm	
Length of teeth	1.15 m			1.20 m	
Max. permissible load	400 kg	1200 kg	600 kg	2000 kg	
Distance between rod centres	865 mm	960 mm	865 mm	Ext. 1530 mm	
Weight	45 kg	100 kg	60 / 60 / 68 kg	120 / 115 / 115 kg	118 / 173 / 126 kg
OPTIONS				Extension tubes (3-tooth model) - Additional tooth/teeth	

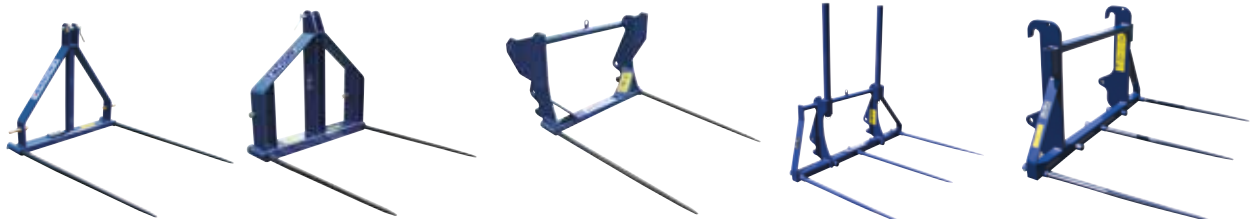

## OPTIONS

Extension tubes  
Ø 40 mm teeth

Signalling kit