

# MULTI-PURPOSE BLADE




## KEY POINTS

- Blade unit made of multiple folds and structure with double cross-bars
- Right- and left-hand orientation as standard
- Extra-large diameter zinc-plated swivel with grease nipples
- Bolt-on **HARDOX**<sup>®</sup> WEAR PLATE wear blade offering excellent abrasion resistance.

## SPECIFICATIONS

Models	Coupling	Height	Hydraulic tilt $\pm 10^\circ$ (requires 1 D.A.)	Orientation		Weight
				Manual	Hydraulic	
2.50 m	On Cat. 2, 3-pt lifting arm. (optional: loader or telescopic)	0.63 m		Standard	Optional (requires 1 D.A.)	560 kg
			Standard			595 kg
3.00 m						596 kg
			Standard			625 kg

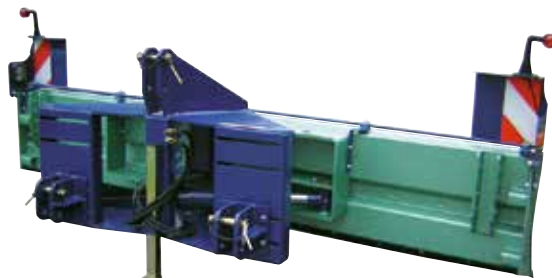

## OPTIONS

Hydraulic orientation  
2-cylinder control kit  
Floating head mounting  
Articulated floating system

Pair of retaining sides and side extensions  
Plate or grid extension  
Double rubber scraper  
Signalling kit