


SPECIAL SERIES

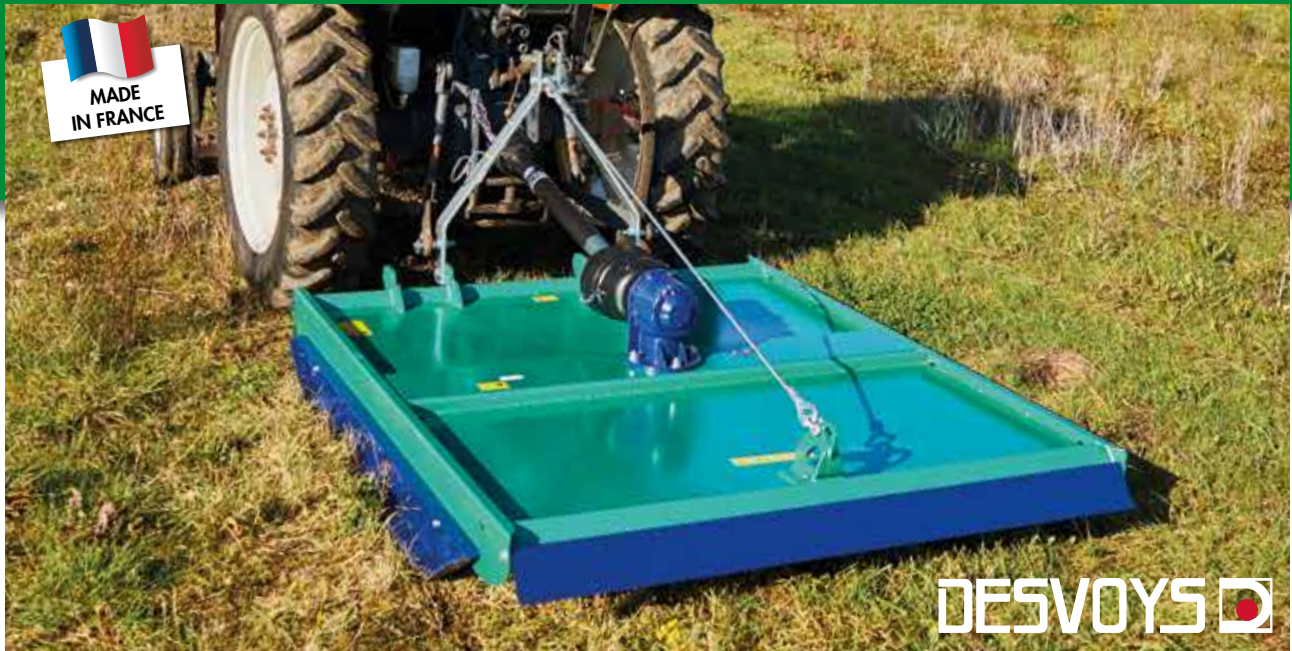

KEY POINTS

- Floating coupling
- Box mounted onto cross-bar
- 2- or 3-cutter rotor depending on models
- Blade with fins and counter-cutters

SPECIFICATIONS

WORKING WIDTH (M)	1.20	1.50	1.50	1.80	1.80
PTO speed (rpm)	540				
Tractor power rating (hp)	22-55	35-55	50-85		60-85
Cat. 2 coupling on pins	Centred or offset by 200 mm (150 mm on 1.20 m model)				
Rotor	2 cutters		3-cutter disc	2 cutters	3-cutter disc
Adjustable terrain tracking	Pair of bolt-on skids				
Cutting height (mm)	40-80-120				
Weight (kg)	252	308	388	432	466

OPTIONS

Transmission with friction limiter and free wheel
Wheel with tyre - adjustable rod height

Signalling kit